

VS9 系列电动执行器

安装说明书


基本参数

工作电源	220 VAC \pm 10 %, 110 VAC \pm 10 %, 24 VAC \pm 10 %, 50 / 60 Hz	功率	\leq 8 VA
控制方式	开关型, 带有弹簧复位功能, 断电常闭	动作时间	开启: \leq 20 s; 关闭: \leq 15 s
工作环境温度	0 °C – 50 °C		
工作相对湿度	10 % – 90 % RH 无冷凝水	防护等级	IP20


命名规则

型号	规格
VS9ZZC00T	220 V, 50 / 60 Hz
VS9ZZB00T	110 V, 50 / 60 Hz
VS9ZZA00T	24 V, 50 / 60 Hz

尺寸

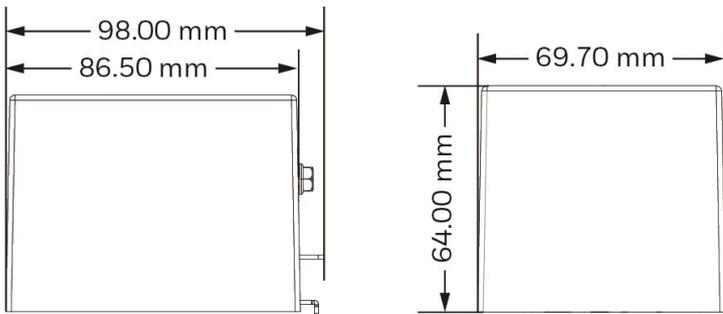

接线图

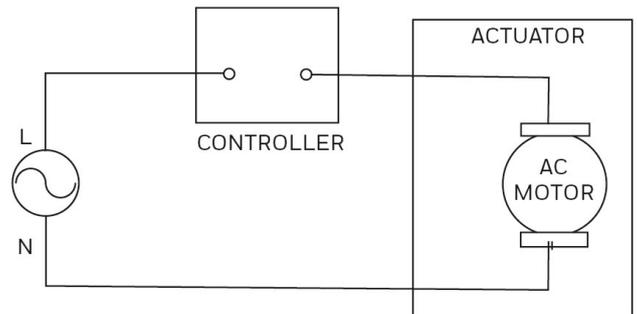

安装注意事项

- 当安装常闭型驱动器时, 必须先把手动操作杆扳到“开”位置。
- 当第一次使用时, 手动操作杆会转移至自动位置上。

霍尼韦尔环境自控产品(天津)有限公司
天津经济技术开发区南海路158号
邮编: 300457

©2022 霍尼韦尔国际公司版权所有。

说明书如有变动, 不另行通知。

版本: A

VS9 Series Actuator

Installation Instructions


Specifications

Operating Voltage	220 VAC ± 10 %, 110 VAC ± 10 %, 24 VAC ± 10 %, 50 / 60 Hz	Power	≤ 8 VA
Control Mode	On-Off, Spring return, normally closed when powered off	Operating Time	Open: ≤ 20 s ; Close: ≤ 15 s
Operating Temperature	0 °C – 50 °C		
Operating Relative Humidity	10 % – 90 % RH, non-condensing	Protection Rating	IP20


Product Naming

Models	Operating Voltage
VS9ZZC00T	220 V, 50 / 60 Hz
VS9ZZB00T	110 V, 50 / 60 Hz
VS9ZZA00T	24 V, 50 / 60 Hz

Dimensions

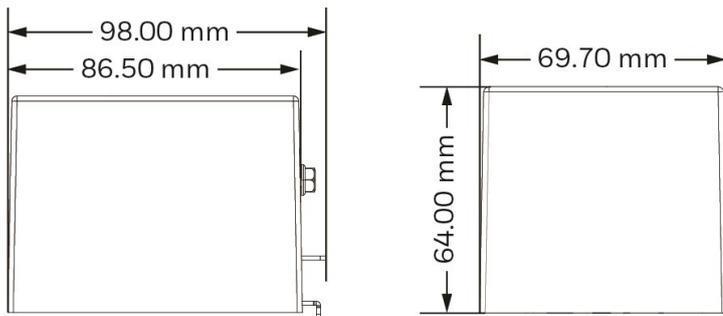

Wiring Diagram

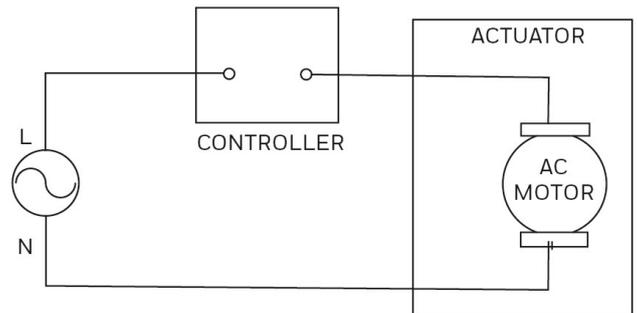

Precautions

- When installing the actuator of normal-closed valve, you must put the manual lever to the “Open” position.
- The manual lever of the actuator will move to the automatic position when you first operate the valve.

Honeywell Environmental & Combustion Controls (Tianjin) Co.,Ltd.
 No. 158, NanHai Road Tianjin Economic-Technological Development Area
 Tianjin, 300457, P.R.C.

©2022 Honeywell International Inc. All rights reserved.

Subject to change without notice.

Rev. A